


● ● **GL 865-DUAL**

GSM | GPRS Embedded

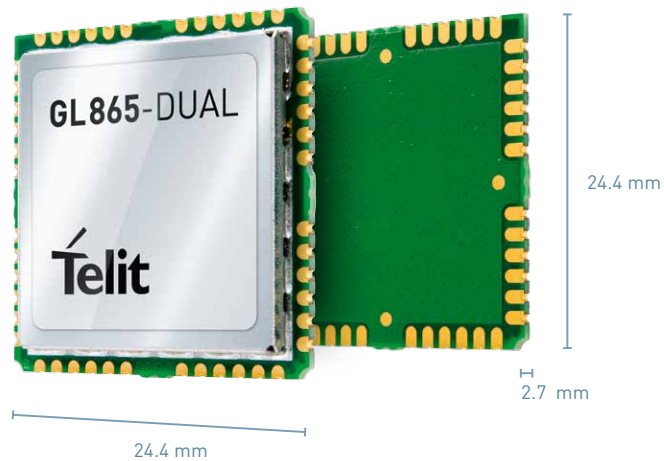

Product Description

The GL865-DUAL variant of the GL865 series, in its LCC castellation packaging technology, ultra-small form factor, excellent energy efficiency, and competitive unit price is the ideal module for mobile applications from low to high-volume across all industries. Areas of application include medical monitoring equipment, miniaturized security systems, and tracking devices for people, animals, and assets.

Key Benefits

- LCC form factor suitable for manual soldering and removal, so it can also serve low volume, niche applications.
- PYTHON Script Interpreter - customers can run their applications directly inside the module
- Premium FOTA Management - Easy firmware update by transmitting only a small delta file

Family Concept

The Telit xL865 family was conceived to address system integrators and developers needing to start with low volumes (LCC mount) as well as those already running high volumes (VQFN mount). Its ultra-compact package allows integration into very small devices. The family includes products that are pin-to-pin and API compatible in GSM | GPRS, CDMA | 1xRTT and UMTS | HSPA.

Telit m2mLOCATE

This product supports m2mLOCATE, a Telit cloud-based service that provides a device's position based on observed cellular Cell-IDs. Accessing a database of over 40 million cell-IDs globally, m2mLOCATE can provide a position for every use-case including indoors/underground, outdoors, and boundary situations.



m2mAIR Ready

This product is capable of supporting the extensive suite of m2mAIR value-added services and connectivity you can use to enhance your application and boost your competitive advantage.

AVAILABLE FOR

- EMEA
- North America
- Latin America
- APAC
- Korea
- Australia

Combine your Cellular module with

- Short Range modules 
- GNSS modules 

www.telit.com

Complete, Ready to Use Access to the Internet of Things



Telit Modules + m2mAIR Mobile Value-Added Services including Connectivity



ONE STOP.
ONE SHOP. NOW, INNOVATE!



●● GL865-DUAL

Product features

- LCC Castellation form factor
- Dual-band EGSM 900 / 1800 MHz
- GSM/GPRS protocol stack 3GPP Release 4 compliant
- Control via AT commands according to 3GPP TS 27.005, 27.007 and Telit custom AT commands
- Serial port multiplexer 3GPP TS 27.010
- SIM access profile
- SIM application toolkit 3GPP TS 51.014
- DARP/SAIC support
- SMS Support
- SMS over GPRS
- Telephony, emergency call
- Half rate, full rate, enhanced full rate and adaptive multi rate voice codecs (HR, FR, EFR, AMR)
- Superior echo cancellation & noise reduction
- Multiple audio profiles pre-programmed and fully configurable by mean AT commands
- DTMF
- SIM phonebook
- Fixed dialing number (FDN)
- Real-time clock
- Alarm management
- Network LED support
- IRA, GSM, 8859-1 and UCS2 character set
- Jamming detection
- Embedded TCP/IP stack, including TCP, IP, UDP, SMTP, ICMP and FTP protocols
- PFM (Premium FOTA Management) Over-The-Air Update service
- Remote AT commands
- Event monitor
- Telit's EASY features EASY SCAN[®] automatic scan over GSM frequencies (also without SIM card)

Data

GPRS data

- GPRS class 10
- Mobile station class B
- Coding scheme 1 to 4
- PBCCH support
- GERAN Feature Package 1 support (NACC, Extended TBF)

CSD

Environmental

- Dimensions: 24.4 x 24.4 x 2.7 mm
- Weight: 2.8 grams
- Extended temperature range
-40°C to +85°C (operational)
-40°C to +85°C (storage temperature)

Interfaces

- 8 I/O ports maximum
- Analog audio (balanced), digital audio
- 2 A/D plus 1 D/A converter
- Buzzer output
- ITU-T V.24 serial link through CMOS UART:
 - Baud rate from 300 to 115,200 bps
 - Autobauding up to 115,200 bps

Approvals

- Fully type approved conforming R&TTE directive
- CE, GCF

Electrical & Sensitivity

- Output power
 - Class 4 (2W) @ 900 MHz
 - Class 1 (1W) @ 1800 MHz
- Supply voltage range: 3.22 - 4.5 VDC (3.8 V DC recommended)
- Power consumption (typical values)
 - Power off: < 5 uA
 - Idle (registered, power saving): 1.5 mA DRX=9
 - Dedicated mode: 230 mA @ max power level
 - GPRS cl.10: 360 mA @ max power level

- Sensitivity:
 - 108 dBm (typ.) @ 900 MHz
 - 107 dBm (typ.) @ 1800 MHz

Software

- Python* application resources
- Python* script interpreter (module takes the application code directly in the Python* language)
- Memory: 800 kB of NV memory for the user scripts and 1 MB RAM for the Python* engine usage



Join the Telit Technical Forum

For a quicker and more rewarding integration experience join the Telit Technical Forum. There you can browse the first open forum covering all m2m topics, get direct support by region (EMEA, North America, Latin America, APAC), take part in this quickly growing m2m community and exchange experiences.